



# ROC BUCKLE


## USER INSTRUCTIONS

EQUIPMENT FOR PROFESSIONALS  
QUALITY YOU CAN COUNT ON



**How to open the buckle in 2 steps:** The buckle should be opened in two steps involving two separate motions:

- 1 Lift the tongue (A) no more than a maximum of 2–3 mm.
- 2 Then pull the buckle in the direction marked by the arrow (B).

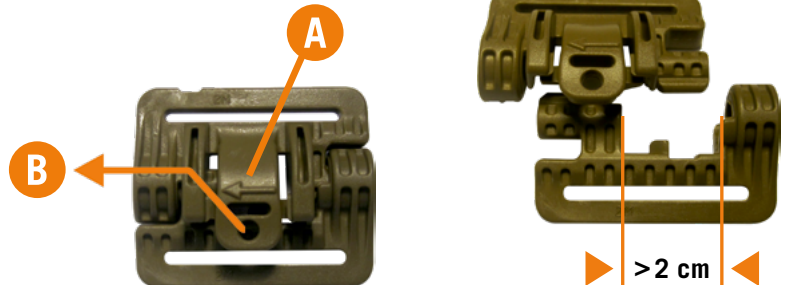

While carrying the product these movements have to be made from inside to outside- for the double-buckle system from top to bottom. See orange arrows in the photograph above.

**The buckle elements must only be moved by less than 2 cm to open the ROC system.**

### ATTENTION

**There is no need to use excessive force. It is most important is to combine the two movements. After repetition it should become a natural motion and provide for smooth operation.**

#### Do not:

- Simply pull the tongue (A) away from your body using maximum force. The opening mechanism will be blocked and damage to the buckles or the buckle fixation may occur.
- Try to pull the buckles simply sideways without previously lifting the tongue (A) before. The opening mechanism will be blocked and damage to the buckles or the buckle fixation may occur.
- Pull the buckle in the opposite direction of the arrow (against the arrow direction). Excessive force will destroy the buckle or the buckle fixation.

For further questions please contact us at +49 8205 9602-0 or email [info@tatonka.com](mailto:info@tatonka.com).